
E33309

Process adapter DIN 11864

ADAPT DIN11864-3-A-BKS-A/DN50

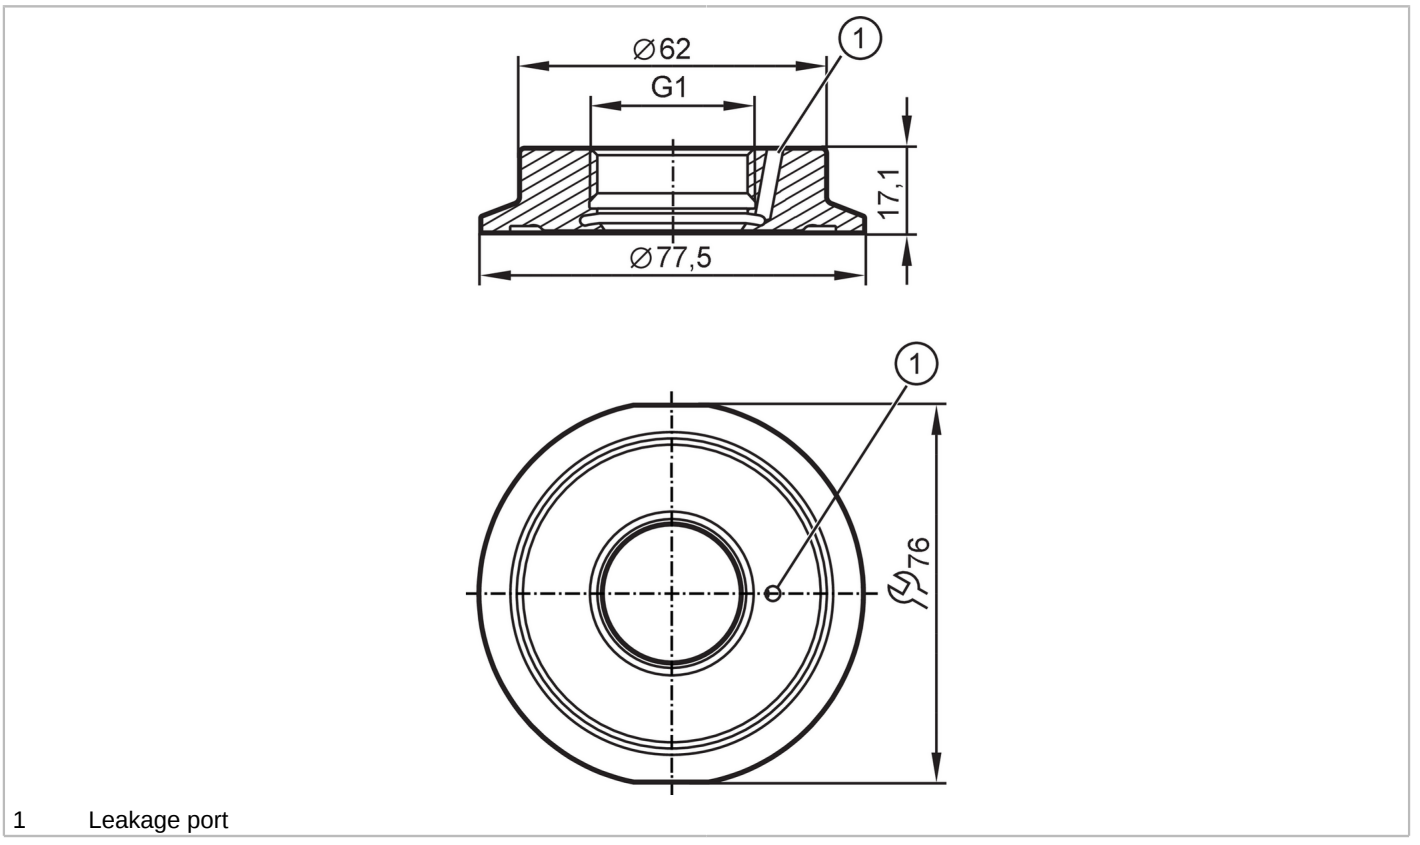

1 Leakage port

EC 1935/2004 EHEDG Certified FCM FCM JP FDA

Application			
Design		with leakage port	
Pressure rating	25 bar	2.5 MPa	
Tests / approvals			
Pressure Equipment Directive		A possible classification to PED depends on the application and has to be carried out by the user / operator.	
Safety instructions		The compatibility between medium and product material has to be checked in all applications.	
Mechanical data			
Weight	[g]	380.5	
Materials (wetted parts)		stainless steel (316L/1.4435) surface characteristics: Ra < 0,4 µm / Rz = 4 µm	
Sensor connection		G 1 internal thread Aseptoflex Vario	
Process connection		Clamp DN50 Ø 77.5 mm DIN 11864-3-A-BKS	
Sealing		Gasket	
Accessories			
Items supplied		O-Ringe: 1 x (24 x 2 mm), EPDM, E30054	
Accessories (optional)		O-Ring: 1 x (24 x 2 mm), FKM, E30123	
		O-Ring: 1 x (24 x 2 mm), EPDM, FCM China, E30163	
		Dichtungsring: 1, PEEK, E30124	
Remarks			
Pack quantity		1 pcs.	