


E33340

Universal process adapter

ADAPT UNI RD52

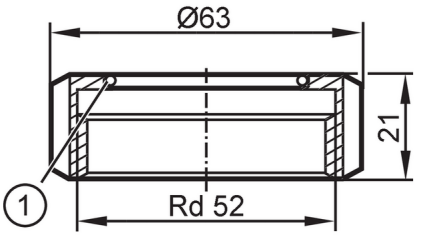

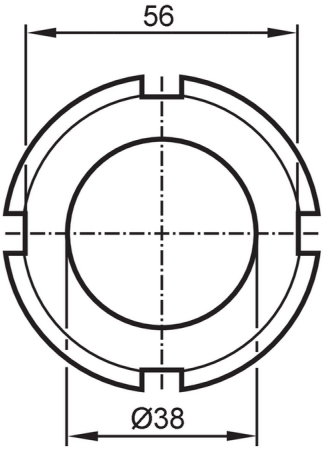

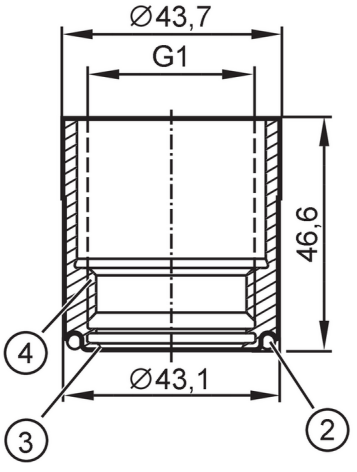

1 O-ring 38 x 2 (FKM) FDA compliant
2 O-ring 36 x 3 (EPDM) FDA compliant
3 sealing area
4 Aseptoflex Vario

EC 1935/2004 FCM FCM JP FDA

Application		
Pressure rating	16 bar	1.6 MPa
Tests / approvals		
Pressure Equipment Directive	A possible classification to PED depends on the application and has to be carried out by the user / operator.	
Safety instructions	The compatibility between medium and product material has to be checked in all applications.	

E33340

Universal process adapter

ADAPT UNI RD52

Mechanical data		
Weight	[g]	364.5
Materials (wetted parts)		stainless steel (316L/1.4435) surface characteristics: Ra < 0,4 µm / Rz = 4 µm
Sensor connection		G 1 internal thread Aseptoflex Vario
Process connection		universal process adapter Rd 52
Sealing		Gasket
Hygienic equipment class to DIN 11866		H4
Accessories		
Items supplied		O-Ringe: 1 x (24 x 2 mm), EPDM, E30054
		O-Ringe: 1 x (38 x 2 mm), FKM
		O-Ringe: 1 x (36 x 3 mm), EPDM
Accessories (optional)		O-Ring: 1 x (24 x 2 mm), FKM, E30123
		O-Ring: 1 x (24 x 2 mm), EPDM, FCM China, E30163
		Dichtungsring: 1, PEEK, E30124
Remarks		
Pack quantity		1 pcs.