
OGD582

Photoelectric distance sensor

OGDLFPKG/IO-LINK/US

Article no longer available - archive entry

Alternative articles: OGD550 or OGD250
When selecting an alternative article and accessories please note that technical data may differ!

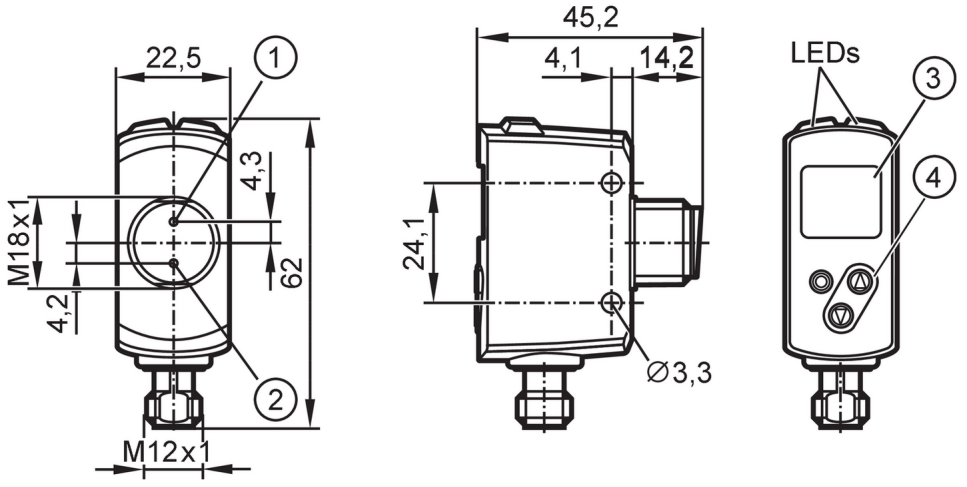

1 receiving element
2 transmitting element
3 alphanumeric display , 3-digit
4 programming buttons

Product characteristics		
Type of light		red light
Laser protection class		1
Housing		rectangular with M18 thread
Application		
Application		Industrial applications / factory automation
Electrical data		
Operating voltage	[V]	10...30 DC; ("supply class 2" to cULus)
Current consumption	[mA]	< 75; (24 V)
Protection class		III
Reverse polarity protection		yes
Type of light		red light
Wave length	[nm]	650
Typ. lifetime	[h]	50000
Inputs		
Inputs		Laser On/ Off
Outputs		
Electrical design		PNP
Output function		2 x normally open / normally closed; (parameterisable)
Max. current load per output	[mA]	100
Type of short-circuit protection		pulsed
Overload protection		yes

OGD582

Photoelectric distance sensor

OGDLFPKG/IO-LINK/US

Detection zone			
Max. light spot diameter	[mm]	5	
Light spot dimensions refer to		at maximum range	
Background suppression	[m]	< 20	
Measuring/setting range			
Measuring range	[m]	0.085...1.5	
Setting range object reflectivity	[%]	6...900; (reflectivity; 6 % black paper; 100 % white paper)	
Sampling rate	[Hz]	33	
Interfaces			
Communication interface		IO-Link	
Transmission type		COM2 (38,4 kBaud)	
IO-Link revision		1.1	
SDCI standard		IEC 61131-9	
Profiles		Function	Device identification
		Function	Process data variable
		Function	Device diagnosis
SIO mode		yes	
Required master port type		A	
Min. process cycle time	[ms]	5	
IO-Link process data (cyclical)		**function**	**bit length**
		process value	2 x 16
		device status	4
		binary switching information	2
IO-Link functions (acyclical)		application specific tag; operating hours counter; switching cycles counter	
Supported DeviceIDs		**Type of operation**	**DeviceID**
		default	926
Note		For further information please see the IODD PDF file under "Downloads"	
Operating conditions			
Ambient temperature	[°C]	-25...60	
Note on ambient temperature		In ambient temperatures < -10 °C a warm-up time is necessary.	
		Laser is off.	
Storage temperature	[°C]	-30...80	
Protection		IP 65; IP 67	
Tests / approvals			
Laser protection class		1	
Notes on laser protection		Caution:	laser light
		laser class:	1
			EN / IEC60825-1:2007
			EN / IEC60825-1:2014
			Complies with 21 CFR 1040.10 except for conformance with IEC 60825-1 Ed. 3, as described in Laser Notice No. 56, dated May 8, 2019.
MTTF	[years]	217	

OGD582

Photoelectric distance sensor

OGDLFPKG/IO-LINK/US

UL approval		Ta	-25...60 °C
		Enclosure type	Type 1
		voltage supply	Class 2
		File number UL	E174191

Mechanical data		
Weight	[g]	229.8
Housing		rectangular with M18 thread
Dimensions	[mm]	61.7 x 22.5 x 45.2
Thread designation		M18 x 1
Materials		housing: stainless steel (316L/1.4404); PPSU; ABS; PMMA; PBT / PC; EPDM; front pane: glass
Lens alignment		side lens


Displays / operating elements		
Display	switching status	2 x LED, yellow
		1 x alphanumeric display, 3-digit
Operating elements	3	pushbutton

Accessories	
Items supplied	lock nuts: 2


Remarks	
Pack quantity	1 pcs.

Electrical connection

Connector: 1 x M12; coding: A; Contacts: 5



Connection

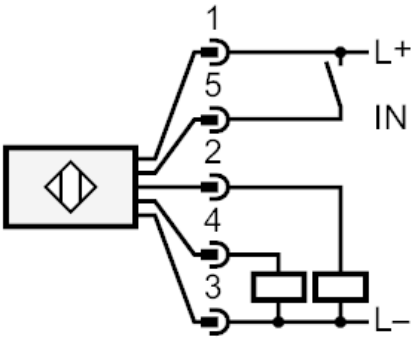

2: OUT2 switching output (object reflectivity)
4: OUT1 switching output or IO-Link (distance)
5: IN Laser On/ Off

OGD582

Photoelectric distance sensor

OGDLFPKG/IO-LINK/US

Other data		
Parameter	Setting range	Factory setting
Uni	cm	cm
OU1	Hno, Hnc, Fno, Fnc, OFF	Hno
SP1 [cm]	8.5…150	150
nP1 [cm]	8.5…150	20
FP1 [cm]	8.5…150	25
LG1	And,Or,Off	Off
dS1 [s]	0…0.1…5	0
dr1 [s]	0…0.1…5	0
OU2	Hno, Hnc, Fno, Fnc, OFF	Hno
SP2 [%]	6…900	6
bP2 [%]	6…900	60
dP2 [%]	6…900	30
HyL	Lo/Hi	Lo
LG2	And,Or,Off	Off
dS2 [s]	0...0.1...5	0
dr2 [s]	0...0.1...5	0
dFO [s]	0...0.1...5	0.1
dIS	ON / OFF	ON

Repeatability: 6 σ

	repeatability of the measured values	
distance	white (90 % remission)	black (6 %...90 % remission)
85 mm	8.0 mm	15.0 mm
750 mm	8.0 mm	15.0 mm
1500 mm	20.0 mm	60.0 mm


The values apply at	
Extraneous light on the object	< 10 klx
constant ambient conditions	23 °C / 960 hPa
minimum power-on time in minutes	15

OGD582

Photoelectric distance sensor


OGDLFPKG/IO-LINK/US

Diagrams and graphs

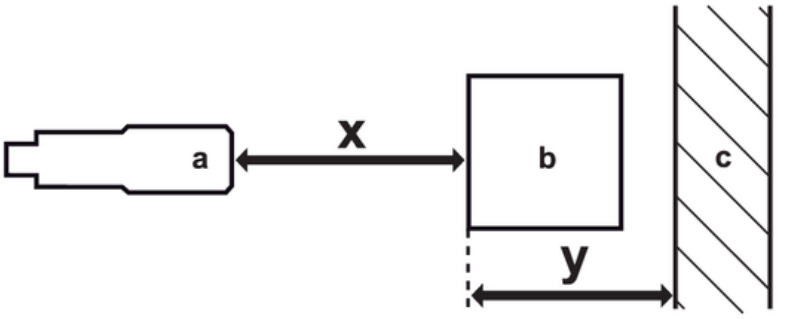

a: sensor
b: object
c: background
x: distance sensor/object [mm]
y: min. distance object/background [mm]

hysteresis curve for distance measurement

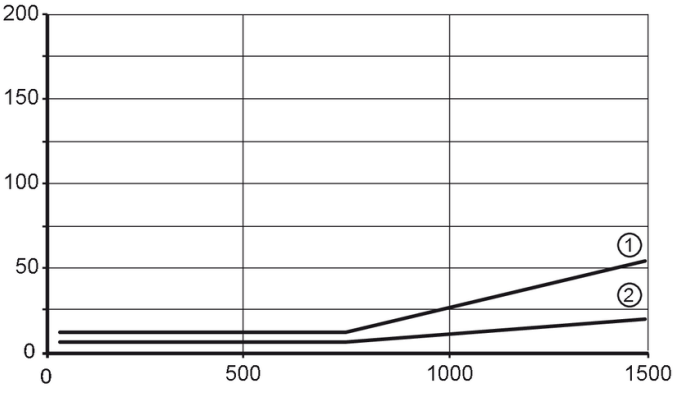


x: distance sensor/object [mm]
y: min. distance object/background [mm]
1 = background (black 6 % remission)
2 = background white (90 % remission)

OGD582

Photoelectric distance sensor

OGDLFPKG/IO-LINK/US

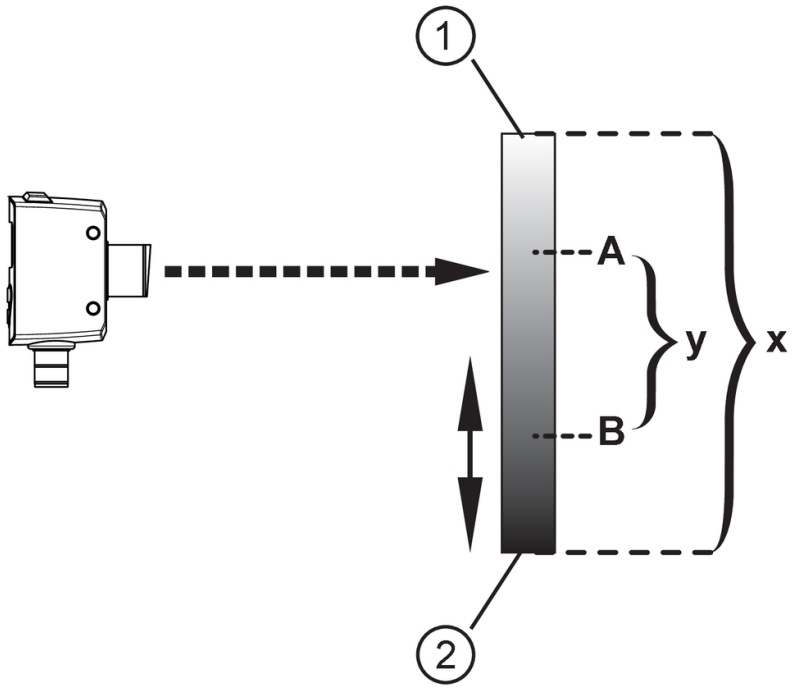

1: bright

2: dark


A: switch point

B: reset point

x: object brightness (object reflectivity)

y: min. reflectivity difference to be detected safely

hysteresis curve for object reflectivity

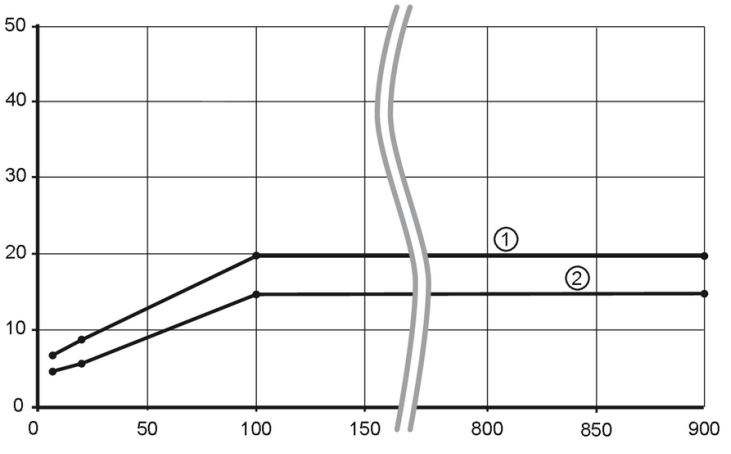

x: object reflectivity (0..900 %)

y: Hysteresis [%]

1 = optional hysteresis curve (high)

2 = Hysteresis Factory setting (low)