
PI2789

Flush pressure sensor with display

PI-,10BREA01-MFRKG/US/ /P

Alternative articles: PI1789

When selecting an alternative article and accessories please note that technical data may differ!

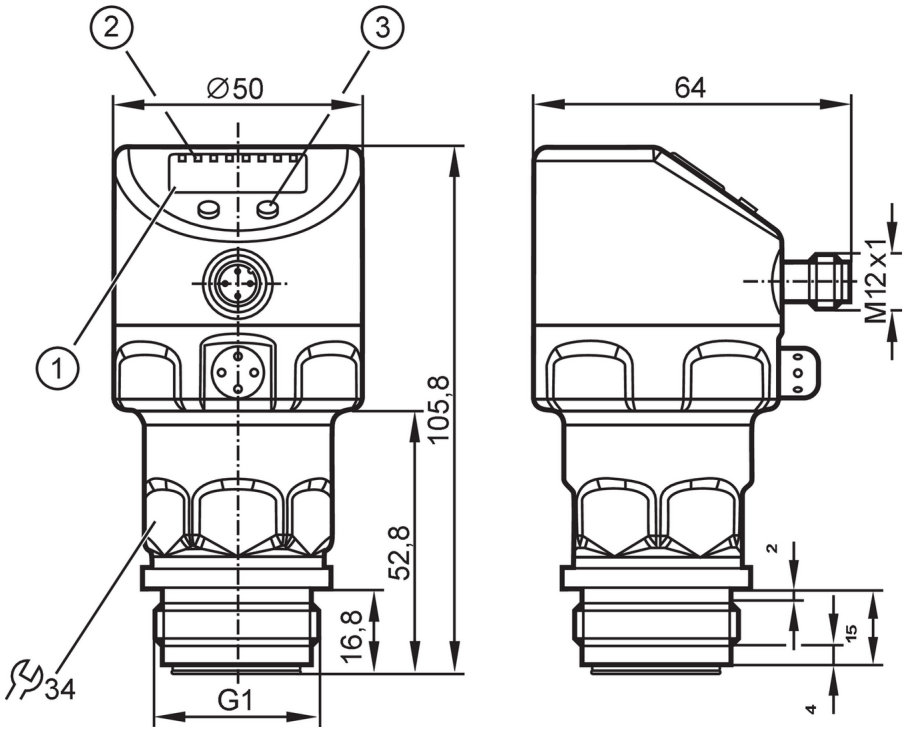

1 alphanumeric display 4-digit
2 status LEDs
3 programming button

ACS CRN EC 1935/2004 EHEDG Certified FCM CN FCM JP IO-Link Reg31

Product characteristics				
Number of inputs and outputs	Number of digital outputs: 2; Number of analogue outputs: 1			
Measuring range	-0.005...0.1 bar	-5...100 mbar	-2...40.16 inH2O	-0.5...10 kPa
Process connection	threaded connection G 1 external thread with Aseptoflex Vario sealing contour			
Note	G1 Gewinde nach ISO 228. Alternativ dichtend über rückwärtige Dichtkontur mit Dichtung in Anlehnung an DIN EN ISO 1179-2.			

Application				
Special feature	Gold-plated contacts			
Application	flush mountable for the food and beverage industry			
Media	viscous media and liquids with suspended particles; liquids and gases			
Medium temperature [°C]	-25...125; (145 max. 1h)			
Min. burst pressure	30000 mbar	12044 inH2O	3000 kPa	
Pressure rating	4000 mbar	1606 inH2O	400 kPa	
Vacuum resistance	-1000 mbar	-0.1 MPa		
Type of pressure	relative pressure			
No dead space	yes			
MAWP for applications according to CRN [bar]	4			

PI2789

Flush pressure sensor with display

PI-,10BREA01-MFRKG/US/ /P

Electrical data					
Min. insulation resistance	[MΩ]	100; (500 V DC)			
Protection class		III			
Reverse polarity protection		yes			
Integrated watchdog		yes			
2-wire					
Operating voltage	[V]	20...32 DC			
Current consumption	[mA]	3.6...21			
Power-on delay time	[s]	1			
3-wire					
Operating voltage	[V]	18...32 DC			
Current consumption	[mA]	< 45			
Power-on delay time	[s]	0.5			
Inputs / outputs					
Number of inputs and outputs		Number of digital outputs: 2; Number of analogue outputs: 1			
Outputs					
Total number of outputs		2			
Output signal		switching signal; analogue signal; IO-Link; (configurable)			
Electrical design		PNP/NPN			
Number of digital outputs		2			
Output function		normally open / normally closed; (parameterisable)			
Number of analogue outputs		1			
Analogue current output	[mA]	4...20, invertible; (scalable)			
Short-circuit protection		yes			
Type of short-circuit protection		pulsed			
Overload protection		yes			
2-wire					
Max. load	[Ω]	300			
3-wire					
Max. voltage drop switching output DC	[V]	2			
Permanent current rating of switching output DC	[mA]	250			
Switching frequency DC	[Hz]	125			
Max. load	[Ω]	(Ub - 10 V) / 20 mA			
Measuring/setting range					
Measuring range		-0.005...0.1 bar	-5...100 mbar	-2...40.16 inH2O	-0.5...10 kPa
Set point SP		-4.8...100 mbar	-1.92...40.16 inH2O	-0.48...10 kPa	
Reset point rP		-5...99.8 mbar	-2...40.08 inH2O	-0.5...9.98 kPa	
Analogue start point		-5...75 mbar	-2...30.12 inH2O	-0.5...7.5 kPa	
Analogue end point		20...100 mbar	8.04...40.16 inH2O	2...10 kPa	
In steps of		0.1 mbar	0.04 inH2O	0.01 kPa	

PI2789

Flush pressure sensor with display

PI-,10BREA01-MFRKG/US/ /P

Factory setting		SP1 = 25 mbar	rP1 = 23 mbar
		SP2 = 75 mbar	rP2 = 73 mbar
		ASP =0 mbar	AEP = 100 mbar
		dAP = 0.06 s	dAA = 0.03 s

Accuracy / deviations		
Switch point accuracy [% of the span]		< ± 0,5; (Turn down 1:1)
Repeatability [% of the span]		< ± 0,1; (with temperature fluctuations < 10 K; Turn down 1:1)
Characteristics deviation [% of the span]		< ± 0,5; (Turn down 1:1 , linearity, incl. hysteresis and repeatability , limit value setting to DIN EN IEC 62828-1)
Linearity deviation [% of the span]		< ± 0,25; (Turn down 1:1)
Hysteresis deviation [% of the span]		< ± 0,2; (Turn down 1:1)
Long-term stability [% of the span]		< ± 0,1; (Turn down 1:1; per year)
Temperature coefficient zero point [% of the span / 10 K]		< ± 0,1; (0...70 °C)
Temperature coefficient span [% of the span / 10 K]		< ± 0,2; (0...70 °C)
Response times		
Damping process value dAP [s]		0...30
Damping for the analogue output dAA [s]		0.01...99.99
2-wire		
Step response time analogue output [ms]		45
3-wire		
Min. response time of switching output (dAP) [ms]		3
Step response time analogue output [ms]		7
Interfaces		
Communication interface		IO-Link
Transmission type		COM2 (38,4 kBaud)
IO-Link revision		1.0
SIO mode		yes
Required master port type		A
Process data analogue		1
Process data binary		2
Min. process cycle time [ms]		2.3
Supported DeviceIDs	**Type of operation**	**DeviceID**
	default	259
Operating conditions		
Ambient temperature [°C]		-25...80
Storage temperature [°C]		-40...100

PI2789

Flush pressure sensor with display

PI-,10BREA01-MFRKG/US/ /P

Protection		IP 67; IP 68; IP 69K	
Tests / approvals			
EMC		EN 61000-4-2 ESD	4 kV CD / 8 kV AD
		EN 61000-4-3 HF radiated	10 V/m
		EN 61000-4-4 Burst	2 kV
		EN 61000-4-5 Surge	0,5/1 kV
		EN 61000-4-6 HF conducted	10 V
Shock resistance		DIN IEC 68-2-27	50 g (11 ms)
Vibration resistance		DIN IEC 68-2-6	20 g (10...2000 Hz)
MTTF	[years]	160	
Note on approval		factory certificate available as download at www.factory-certificate.ifm	
UL approval		UL approval no.	J018
		File number UL	E174189
Mechanical data			
Weight	[g]	362.6	
Housing		cylindrical	
Dimensions	[mm]	Ø 50 / L = 105.8	
Materials		stainless steel (316L/1.4404); FKM; PTFE; PBT; PEI; PFA	
Materials (wetted parts)		ceramics (99.9 % Al2O3); stainless steel (316L/1.4435) surface characteristics: Ra < 0,4 µm / Rz = 4 µm; PTFE	
Min. pressure cycles		100 million	
Process connection		threaded connection G 1 external thread with Aseptoflex Vario sealing contour	
Displays / operating elements			
Display		Display unit	LED, green
		switching status	LED, yellow
		function display	alphanumeric display, 4-digit
		measured values	alphanumeric display, 4-digit
Display unit		mbar; kPa; inH2O; mmWS; % of the span	
Remarks			
Pack quantity		1 pcs.	
Electrical connection			

Connector: 1 x M12; coding: A; Contacts: 4, gold-plated




PI2789

Flush pressure sensor with display

PI-,10BREA01-MFRKG/US/ /P

Connection

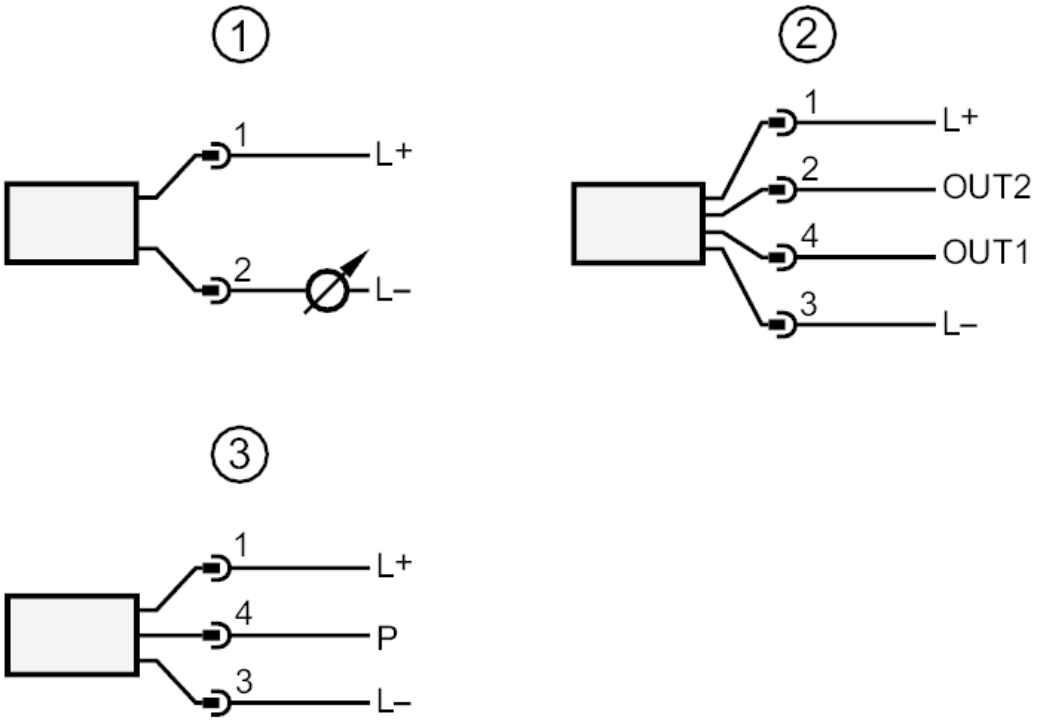

1	connection for 2-wire operation
2	connection for 3-wire operation :
OUT1	switching output
OUT2	switching output
	analogue output
3	connection for IO-Link parameter setting (P = communication via IO-Link)