
OG5125

Retro-reflective sensor

OGP-HPKG/US/90°

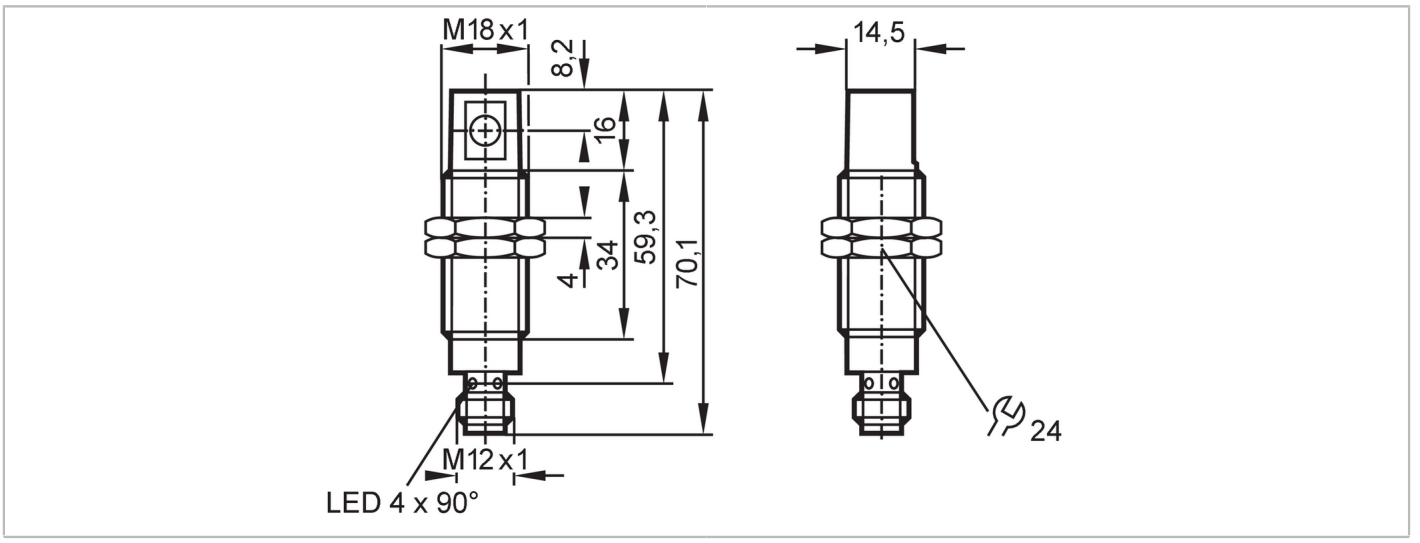

Product characteristics		
Type of light		red light
Housing		threaded type
Application		
Special feature		polarisation filter
Function principle		Retro-reflective sensor
Application		Industrial applications / factory automation
Electrical data		
Operating voltage	[V]	10...30 DC; ("supply class 2" to cULus)
Current consumption	[mA]	< 22
Protection class		II
Reverse polarity protection		yes
Type of light		red light
Wave length	[nm]	660
Outputs		
Electrical design		PNP
Output function		light-on mode
Max. voltage drop switching output DC	[V]	2.5
Permanent current rating of switching output DC	[mA]	200
Switching frequency DC	[Hz]	500
Short-circuit protection		yes
Type of short-circuit protection		pulsed
Overload protection		yes
Detection zone		
Range referred to prismatic reflector	[m]	3; (Prismatic reflector Ø 80 E20005)

OG5125

Retro-reflective sensor

OGP-HPKG/US/90°

Range adjustable		no	
Max. light spot diameter	[mm]	96	
Light spot dimensions refer to		at maximum range	
Polarisation filter available		yes	
Operating conditions			
Ambient temperature	[°C]	-25...60	
Protection		IP 68	
Tests / approvals			
EMC		EN 60947-5-2	
		EN 55011	class B
MTTF	[years]	859	
Mechanical data			
Weight	[g]	59.5	
Housing		threaded type	
Dimensions	[mm]	M18 x 1 / L = 59.3	
Thread designation		M18 x 1	
Materials		housing: stainless steel; cover: ABS	
Lens material		front pane:PMMA	
Displays / operating elements			
Display		switching status	1 x LED, yellow
		operation	1 x LED, green
Accessories			
Items supplied		Nuts: 2	
		lock washers: 2	
Remarks			
Pack quantity		1 pcs.	
Electrical connection			

Connector: 1 x M12; coding: A; Contacts: 4



Connection

