
E33222

Process adapter Varivent

ADAPT IFM-VARIV TYP N (D=68)

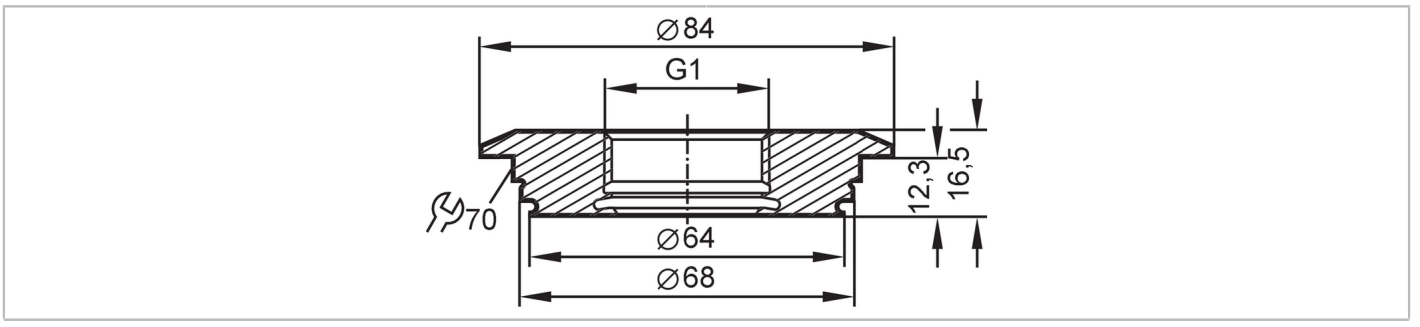

EC 1935/2004 FCM FCM JP FDA Hygienic Cleanable

Application			
Pressure rating		25 bar	2.5 MPa
Tests / approvals			
Pressure Equipment Directive		A possible classification to PED depends on the application and has to be carried out by the user / operator.	
Safety instructions		The compatibility between medium and product material has to be checked in all applications.	
Mechanical data			
Weight	[g]	472.5	
Materials (wetted parts)		stainless steel (316L/1.4435) surface characteristics: Ra < 0,4 µm / Rz = 4 µm	
Sensor connection		G 1 internal thread Aseptoflex Vario	
Process connection		Varivent Form N, DN40...DN150 (1,5...6"), Ø 68 mm Ø 84 mm	
Sealing		Gasket	
Hygienic equipment class to DIN 11866		H4	
Accessories			
Items supplied		O-Ringe: 1 x (24 x 2 mm), EPDM, E30054	
Accessories (optional)		O-Ring: 1 x (24 x 2 mm), FKM, E30123	
		O-Ring: 1 x (24 x 2 mm), EPDM, FCM China, E30163	
		Dichtungsring: 1, PEEK, E30124	
Remarks			
Pack quantity		1 pcs.	