
PN016A

Pressure sensor with display

PN-2,5-RBR14-QFPKG/US/3D /V

Article no longer available - archive entry

Alternative articles: PA306A
When selecting an alternative article and accessories please note that technical data may differ!

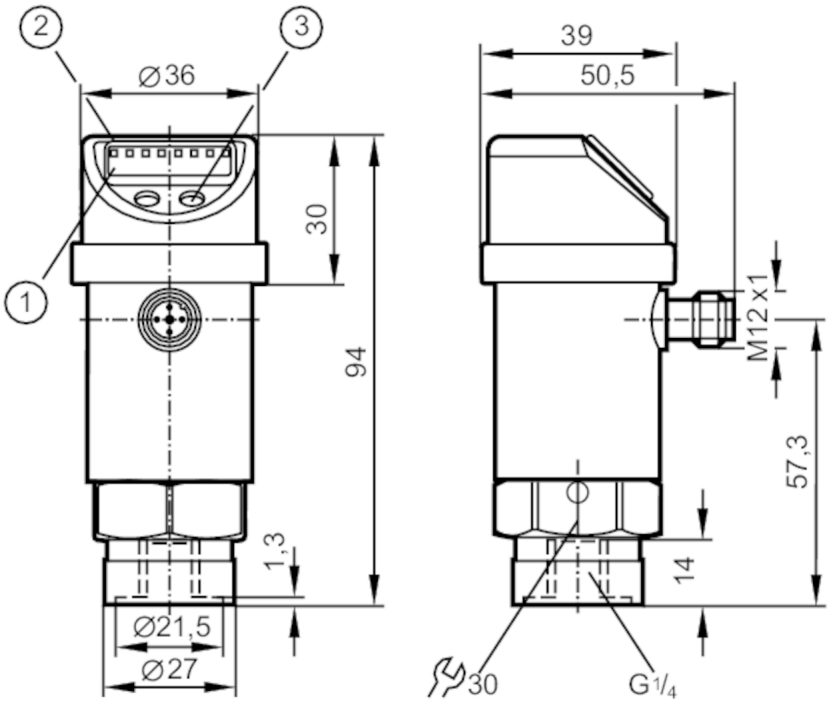

1 alphanumeric display 4-digit
2 LEDs Display unit / switching status
3 programming button

Product characteristics				
Number of inputs and outputs	Number of digital outputs: 2			
Measuring range	0...2.5 bar	0...2500 mbar	0...36.3 psi	0...250 kPa
Process connection	threaded connection G 1/4 internal thread			
Application				
Special feature	Gold-plated contacts			
Application	for industrial applications			
Media	liquids and gases			
Medium temperature [°C]	-20...60			
Min. burst pressure	50 bar	725 psi	5000 kPa	
Pressure rating	20 bar	290 psi	2000 kPa	
Type of pressure	relative pressure			
Electrical data				
Operating voltage [V]	18...36 DC; (to SELV/PELV)			
Current consumption [mA]	< 50			
Protection class	III			
Reverse polarity protection	yes			

PN016A

Pressure sensor with display

PN-2,5-RBR14-QFPKG/US/3D /V

Overvoltage protection		yes; (< 40 V)			
Power-on delay time	[s]	0.3			
Integrated watchdog		yes			
Inputs / outputs					
Number of inputs and outputs		Number of digital outputs: 2			
Outputs					
Total number of outputs		2			
Output signal		switching signal; IO-Link; (configurable)			
Electrical design		PNP/NPN			
Number of digital outputs		2			
Output function		normally open / normally closed; (parameterisable)			
Max. voltage drop switching output DC	[V]	2			
Permanent current rating of switching output DC	[mA]	250			
Switching frequency DC	[Hz]	< 170			
Short-circuit protection		yes			
Type of short-circuit protection		pulsed			
Measuring/setting range					
Measuring range		0...2.5 bar	0...2500 mbar	0...36.3 psi	0...250 kPa
Set point SP		0.02...2.5 bar	0.4...36.2 psi	2...250 kPa	
Reset point rP		0.01...2.49 bar	0.2...36 psi	1...249 kPa	
In steps of		0.01 bar	0.2 psi	1 kPa	
Factory setting		SP1 = 0.63 bar	rP1 = 0.58 bar		
		SP2 = 1.88 bar	rP2 = 1.83 bar		
Accuracy / deviations					
Switch point accuracy	[% of the span]	< ± 0,5			
Repeatability	[% of the span]	< ± 0,1; (with temperature fluctuations < 10 K)			
Characteristics deviation	[% of the span]	< ± 0,25 (BFSL) / < ± 0,5 (LS); (BFSL = Best Fit Straight Line; LS = limit value setting)			
Hysteresis deviation	[% of the span]	< ± 0,25			
Long-term stability	[% of the span]	< ± 0,05; (per 6 months)			
Temperature coefficient zero point	[% of the span / 10 K]	0,2; (0...60 °C)			
Temperature coefficient span	[% of the span / 10 K]	0,2; (0...60 °C)			
Response times					
Delay time programmable dS, dr	[s]	0; 0,2...50			
Software / programming					
Parameter setting options		hysteresis / window; normally open / normally closed; diagnostic function; switching logic; switch-on/switch-off delay; Damping; Display unit			

PN016A

Pressure sensor with display

PN-2,5-RBR14-QFPKG/US/3D /V

Interfaces			
Communication interface		IO-Link	
Transmission type		COM2 (38,4 kBaud)	
IO-Link revision		1.1	
SDCI standard		IEC 61131-9 CDV	
SIO mode		yes	
Required master port type		A	
Process data analogue		1	
Process data binary		2	
Min. process cycle time	[ms]	2.3	
Supported DeviceIDs		**Type of operation**	**DeviceID**
		default	312
Operating conditions			
Ambient temperature	[°C]	-20...60	
Storage temperature	[°C]	-40...100	
Protection		IP 65	
Tests / approvals			
ATEX marking		II 3D Ex tc IIIC T80°C Dc X	
EMC		EN 61000-4-2 ESD	4 kV CD / 8 kV AD
		EN 61000-4-3 HF radiated	10 V/m
		EN 61000-4-4 Burst	2 kV
		EN 61000-4-5 Surge	0,5/1 kV
		EN 61000-4-6 HF conducted	10 V
Shock resistance		DIN IEC 68-2-27	50 g (11 ms)
Vibration resistance		DIN IEC 68-2-6	20 g (10...2000 Hz)
MTTF	[years]	194	
Pressure Equipment Directive		Sound engineering practice; can be used for group 2 fluids; group 1 fluids on request	
Mechanical data			
Weight	[g]	303	
Housing		cylindrical	
Dimensions	[mm]	Ø 36 / L = 94	
Materials		stainless steel (304/1.4301); stainless steel (316L/1.4404); PC; PBT; PEI; FKM; PTFE	
Materials (wetted parts)		stainless steel (303/1.4305); ceramics; FKM	
Min. pressure cycles		100 million	
Process connection		threaded connection G 1/4 internal thread	
Restrictor element integrated		no (can be retrofitted)	
Displays / operating elements			
Display		Display unit	3 x LED, green
		switching status	2 x LED, yellow
		function display	alphanumeric display, 4-digit
		measured values	alphanumeric display, 4-digit
Remarks			
Pack quantity		1 pcs.	

PN016A


Pressure sensor with display


PN-2,5-RBR14-QFPKG/US/3D /V

Electrical connection

Connector: 1 x M12; coding: A; Contacts: 4, gold-plated



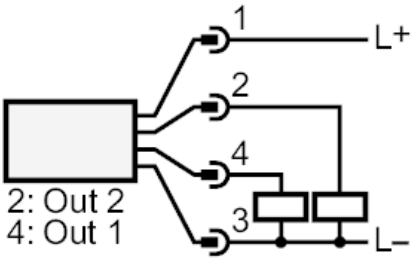

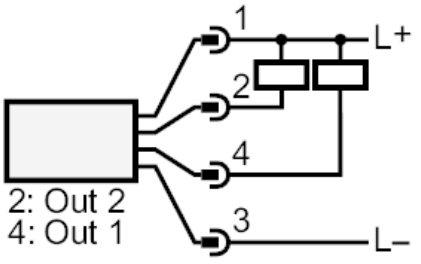

OUT1	switching output IO-Link
OUT2	switching output Diagnostic output