
E30149

Welding adapter for process sensors

WELDING ADAPT D60/G1 LEAK PORT

recommended for wall thickness <= 3 mm. There are more suitable welding adapters for thicker walls.

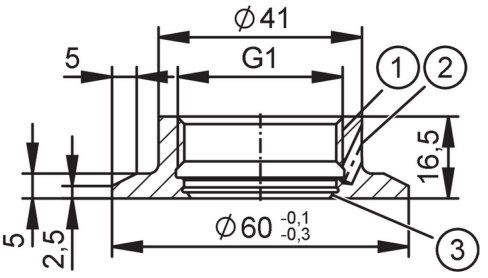

1 G1 internal thread Aseptoflex Vario
2 Leakage port
3 sealing area

EC 1935/2004 EHEDG Certified

Application		
Design		with leakage port
Installation		recommended for wall thickness <= 3 mm
Pressure rating	[bar]	25
Note on pressure rating		for the connection sensor - adapter
Tests / approvals		
Pressure Equipment Directive		A possible classification to PED depends on the application and has to be carried out by the user / operator.
Safety instructions		The compatibility between medium and product material has to be checked in all applications.
Mechanical data		
Weight	[g]	156
Materials (wetted parts)		stainless steel (316L/1.4435) surface characteristics: Ra < 0,4 µm / Rz = 4 µm
Sensor connection		G 1 internal thread Aseptoflex Vario
Process connection		welding adapter Ø 60 mm
Sealing		Gasket
Accessories		
Items supplied		O-Ringe: 1 x (24 x 2 mm), EPDM, E30054
Accessories (optional)		O-Ring: 1 x (24 x 2 mm), FKM, E30123
		O-Ring: 1 x (24 x 2 mm), EPDM, FCM China, E30163
		Einschweißdorn, E30452
		Einschweißdorn wassergekühlt, E30532
		Leckagetest, E30530
		Schleifschutz, E30160
Remarks		
Notes		recommended for wall thickness <= 3 mm. There are more suitable welding adapters for thicker walls.
Pack quantity		1 pcs.