
MK501A

T-slot cylinder sensor

MKT3028BBPKG/G/0,3M/ZH/US/3D/3G

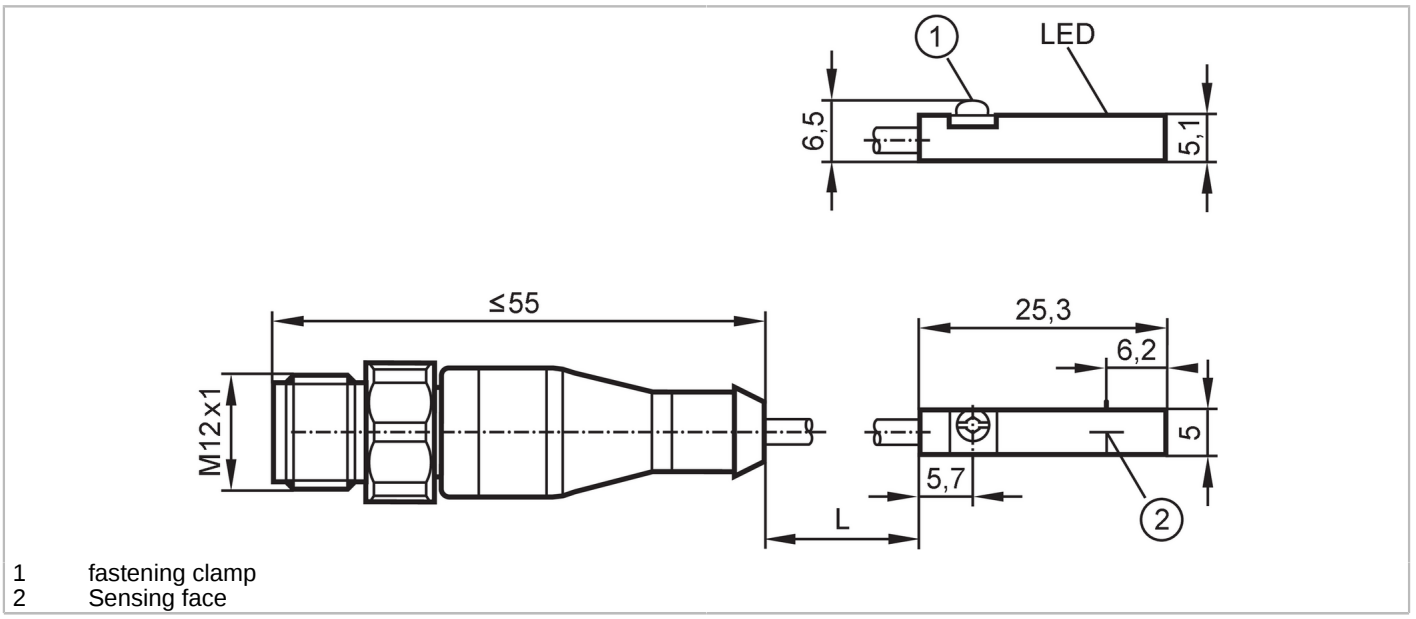

1 fastening clamp
2 Sensing face

Product characteristics		
Electrical design		PNP
Output function		normally open
Dimensions	[mm]	25 x 5 x 6.5
Electrical data		
Operating voltage	[V]	10...30 DC
Current consumption	[mA]	< 10
Protection class		III
Reverse polarity protection		yes
Max. power-on delay time	[ms]	30
Outputs		
Electrical design		PNP
Output function		normally open
Max. voltage drop switching output DC	[V]	2.5
Permanent current rating of switching output DC	[mA]	100
Switching frequency DC	[Hz]	10000
Short-circuit protection		yes
Overload protection		yes
Detection zone		
Response sensitivity	[mT]	2.8
Travel speed	[m/s]	> 10
Accuracy / deviations		
Hysteresis	[mm]	< 1.5
Repeatability	[mm]	< 0.2

MK501A

T-slot cylinder sensor


MKT3028BBPKG/G/0,3M/ZH/US/3D/3G

Operating conditions			
Ambient temperature	[°C]	-25...60	
Protection		IP 65; IP 67	
Tests / approvals			
Approval		BVS 24 ATEX E 046 X; IECEx BVS 24.0040X	
ATEX marking		II 3G Ex ec IIC T4 Gc	
		II 3D Ex tc IIIC T125°C Dc	
EMC		EN 61000-4-2 ESD	- CD / 8 kV AD
		EN 61000-4-3 HF radiated	10 V/m
		EN 61000-4-4 Burst	2 kV
		EN 61000-4-6 HF conducted	10 V
		EN 55011	class B
MTTF	[years]	3694	
Mechanical data			
Weight	[g]	52.4	
Mounting		flush mountable	
Type of mounting		fastening clamp with combined slot / hexagon socket, width across flats 1.5	
Cylinder type		T-slot cylinders; (adapters allow mounting to different cylinder types)	
Dimensions	[mm]	25 x 5 x 6.5	
Materials		PA; stainless steel	
Displays / operating elements			
Display		switching status	1 x LED, yellow
Accessories			
Items supplied		rubber placeholder: 1	
		Cable clip: 1	
		Protective cover: 1 x T-Nut, E12259	
Remarks			
Pack quantity		1 pcs.	

Electrical connection - plug

Cable: 0.3 m, PUR

Connector: 1 x M12; coding: A; Contacts: 4; Locking: Hexagon nut, rotatable, stainless steel



MK501A

T-slot cylinder sensor

MKT3028BBPKG/G/0,3M/ZH/US/3D/3G

Connection

