
E33713

Process adapter hygienic pipe fitting

ADAPT IFM-DIN11851 DN50/2"

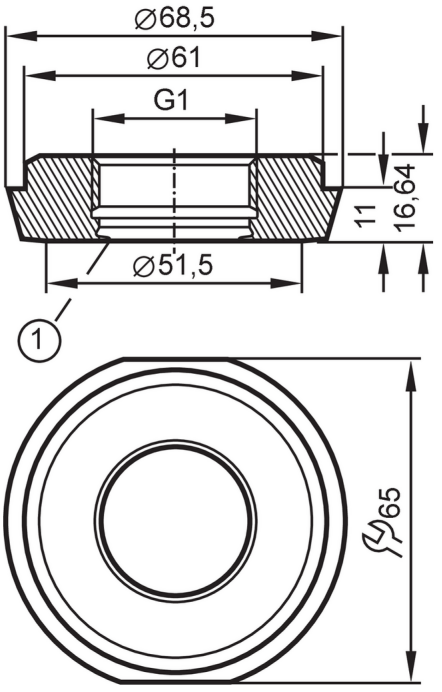

1 sealing edge

ADI-FREE EC 1935/2004 FCM CN FCM JP FDA

Application			
Pressure rating		25 bar	2.5 MPa
Tests / approvals			
Pressure Equipment Directive		A possible classification to PED depends on the application and has to be carried out by the user / operator.	
Safety instructions		The compatibility between medium and product material has to be checked in all applications.	
Mechanical data			
Weight	[g]	353	
Materials (wetted parts)		stainless steel (316L/1.4435) surface characteristics: Ra < 0,4 µm / Rz = 4 µm	
Sensor connection		G 1 internal thread Aseptoflex Vario	
Process connection		hygienic pipe fitting DN50 (2") Ø 68.5 mm DIN 11851	
Sealing		metal to metal	
Hygienic equipment class to DIN 11866		H4	
Remarks			
Pack quantity		1 pcs.	