SICK.COM



DATA SHEET

GRSE18-P2442

GR18
Photoelectric sensors

SICK Sensor Intelligence



Illustration may differ

PHOTOELECTRIC SENSORS

GRSE18-P2442

ORDERING INFORMATION

Type	part no.
GRSE18-P2442	1066573

Further device versions and accessories at www.sick.com/GR18

DETAILED TECHNICAL DATA

FEATURES

Functional principle	Through-beam photoelectric sensor
Dimensions (W x H x D)	18 mm x 18 mm x 73.5 mm
Housing design (light emission)	Cylindrical
Thread diameter (housing)	M18 x 1
Optical axis	Axial
Sensing range max.	0 m ... 15 m
Sensing range	0 m ... 10 m
Type of light	Visible red light
Light source	PinPoint LED [1]
Light spot size (distance)	Ø 250 mm (10 m)
Wave length	650 nm
Adjustment	Potentiometer
Display	
LED green	Operating indicator Static on: power on
LED yellow	Status of received light beam Static on: object not present Static off: object present

[1] Average service life: 100,000 h at T_U = +25 °C.

MECHANICS/ELECTRONICS

Supply voltage U_B	10 V DC ... 30 V DC [1]
Ripple	< 5 V_{pp} [2]
Current consumption	30 mA
Switching output	PNP
Output function	Complementary
Switching mode	Light/dark switching
Signal voltage PNP HIGH/LOW	V_S - (≤ 3 V) / approx. 0 V
Output current $I_{max.}$	≤ 100 mA [3]
Response time	< 500 µs [4]
Switching frequency	1,000 Hz [5]
Connection type	Male connector M12, 4-pin
Circuit protection	A [6] B [7] D [8]
Protection class	III
Housing material	Metal, Nickel-plated brass and ABS
Optics material	Plastic, PMMA
Enclosure rating	IP67
Items supplied	Fastening nuts (4 x)
Electromagnetic compatibility (EMC)	EN 60947-5-2
Test input	Sender OFF at "Test" 0 V
Ambient operating temperature	–25 °C ... +55 °C [9]
Ambient temperature, storage	–40 °C ... +70 °C
UL File No.	E348498
Part number of individual components	2072237 GRS18-D2441 2072238 GRE18-P2432

[1] Limit values. Operated in short-circuit protected network: max. 8 A.

[2] May not fall below or exceed U_v tolerances.

[3] At Uv > 24 V or ambient temperature > 49 °C, IA max. = 50 mA.

[4] Signal transit time with resistive load.

[5] With light/dark ratio 1:1.

[6] A = V_S connections reverse-polarity protected.

[7] B = inputs and output reverse-polarity protected.

[8] D = outputs overcurrent and short-circuit protected.

[9] At U_v <=24V and I_A<50mA.

CERTIFICATES

EU declaration of conformity	✓
UK declaration of conformity	✓
ACMA declaration of conformity	✓
Moroccan declaration of conformity	✓
China RoHS	✓
China Compulsory Product Certification (CCC) ex-empt	✓
ECOLAB certificate	✓
cULus certificate	✓


Photobiological safety (DIN EN 62471) certificate	✓

ADJUSTMENTS GRL18(S), GRSE18(S), SENSITIVITY SETTING: POTENTIOMETER, 270°






CONNECTION DIAGRAM CD-072

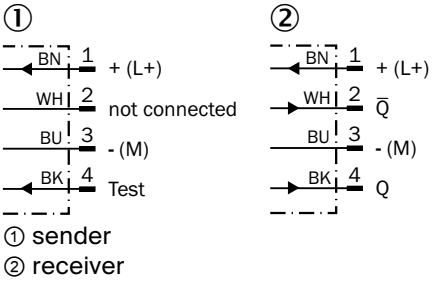


① sender
② receiver


CHARACTERISTIC CURVE GRSE18S

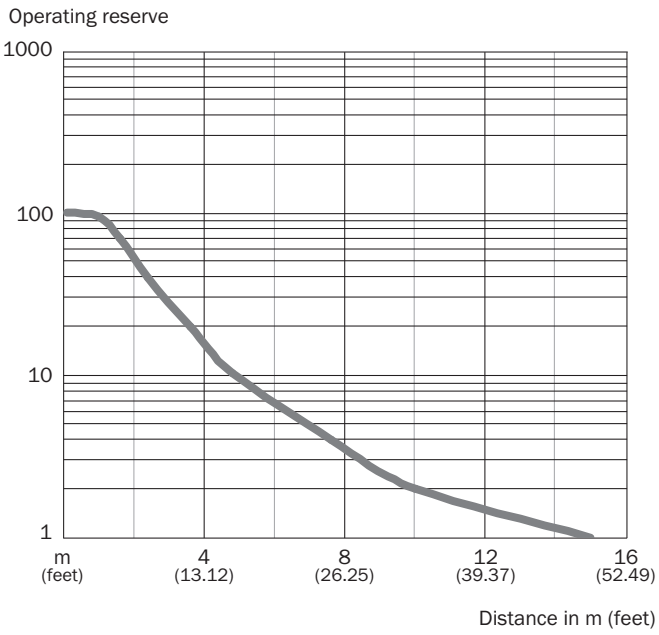


LIGHT SPOT SIZE GRSE18, RED LIGHT




SENSING RANGE DIAGRAM GRSE18S

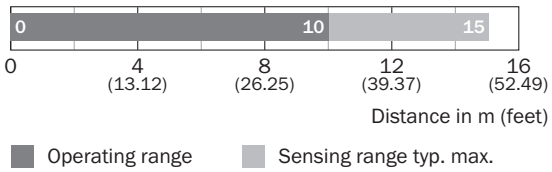

RESPONSE RANGE GRSE18S

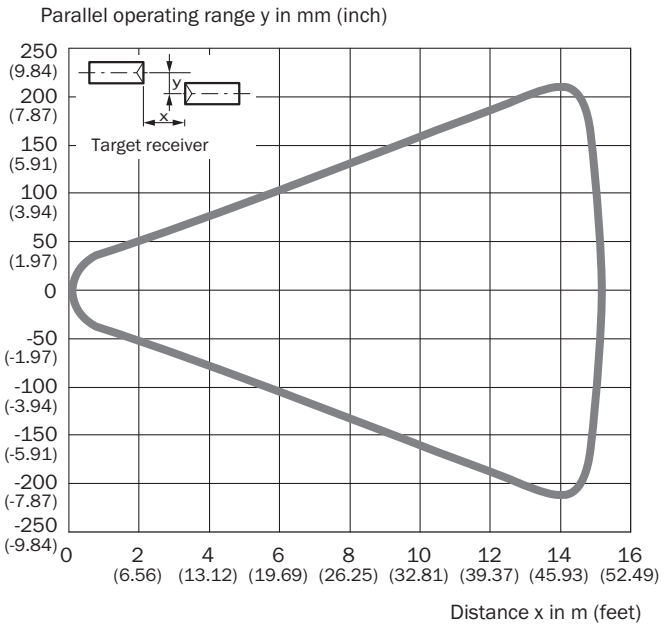

DIMENSIONAL DRAWING GRTE18, GRL18, GRSE18, METAL, CONNECTOR, STRAIGHT

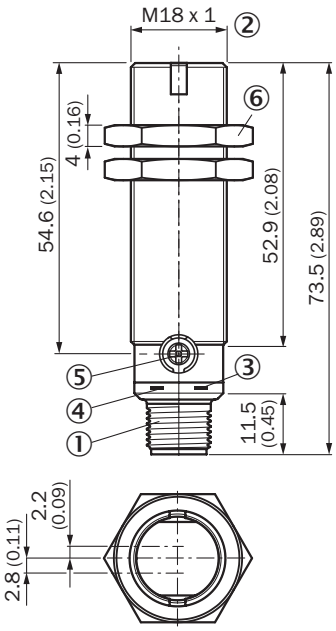

Dimensions in mm (inch)
① male connector M12, 4-pin
② Threaded mounting hole M18 x 1
③ LED indicator yellow
④ LED indicator green
⑤ sensitivity control: potentiometer 270°
⑥ Fastening nuts (2x); width across 24, metal

Further information as well as suitable accessories, example applications and downloads such as CAD dimensional models, operating instructions and software can be found at www.sick.com/1066573

SICK AG
WALDKIRCH
GERMANY
SICK.COM

SICK AT A GLANCE

SICK is a leading global technology company for intelligent sensors and integrated solutions in industrial automation. Our technologies set benchmarks, making your industrial processes more efficient, safer and more sustainable – both in logistics and manufacturing operations.

SICK combines sensor intelligence with industry expertise and certified consulting services. We provide the ideal foundation for scalable as well as tailor-made automation solutions and create added value along the entire value chain. Our close partnerships with our customers are more than just a promise: Together, we optimize productivity, improve quality, protect health and safety, and help build a sustainable future. All with empathy and trust.

Since 1946, we have been developing innovative technologies with passion and a pioneering spirit. With a global network in around 40 countries, SICK has a global presence and is always close by. The company's headquarters are located in Waldkirch near Freiburg, Germany. Our customers benefit from our understanding of both local and global requirements, which enables us to deliver tailor-made solutions

SICK

Sensor Intelligence