
E33701

Process adapter Tri-Clamp

ADAPT IFM-CLAMP ISO2852 1-1.5"

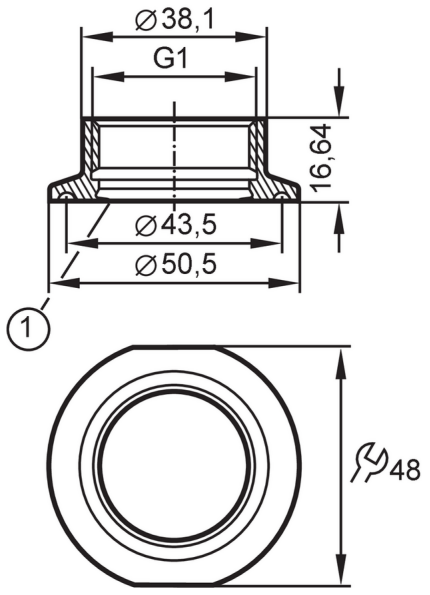

1 sealing edge

ADI-FREE CRN EC 1935/2004 FCM CN FCM JP FDA

Application			
Pressure rating	16 bar	1.6 MPa	
MAWP for applications according to CRN [bar]	16		
Tests / approvals			
Pressure Equipment Directive	A possible classification to PED depends on the application and has to be carried out by the user / operator.		
Safety instructions	The compatibility between medium and product material has to be checked in all applications.		
Mechanical data			
Weight [g]	101		
Materials (wetted parts)	stainless steel (316L/1.4435) surface characteristics: Ra < 0,4 µm / Rz = 4 µm		
Sensor connection	G 1 internal thread Aseptoflex Vario		
Process connection	Clamp DN25...DN40 (1...1,5") Ø 50.5 mm DIN 32676 (ISO 2852)		
Suitable for process connections in accordance with the standards	DIN 32676 series A (DIN)	clamp DN32, DN40	
	DIN 32676 series B (ISO)	clamp DN33,7	
	DIN 32676 series C (ASME BPE)	clamp 1,5"	
	ISO 2852	clamp DN33,7, DN38	
Sealing	metal to metal		
Hygienic equipment class to DIN 11866	H4		
Remarks			
Pack quantity	1 pcs.		