
PN3129

Pressure sensor with display

PN-0-1BRER14-MFRKG/US/ /V

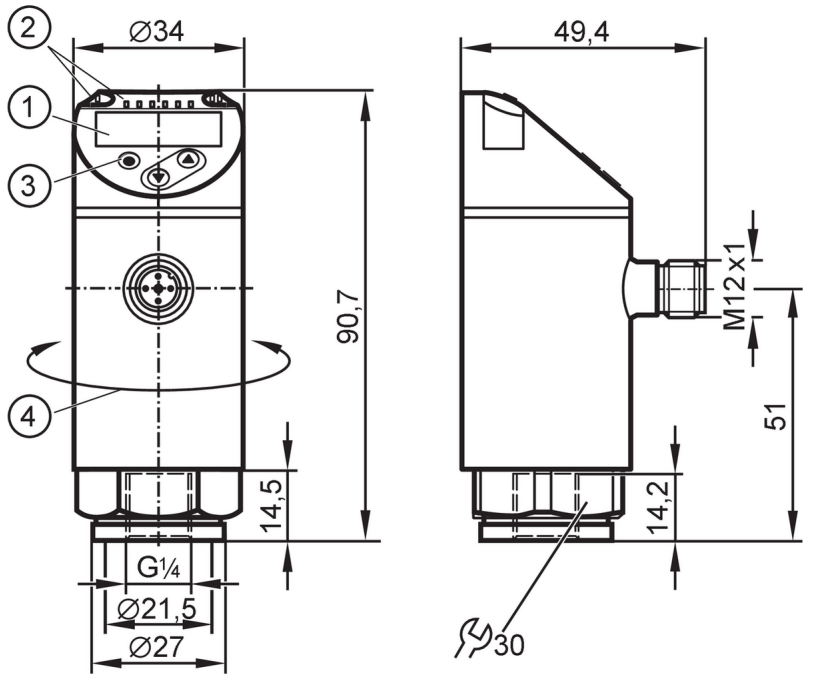

1 alphanumeric display 4-digit red/green
2 LEDs Display unit / switching status
3 programming button
4 upper part of the housing can be rotated 345°

Product characteristics					
Number of inputs and outputs	Number of digital outputs: 1; Number of analogue outputs: 1				
Measuring range	-1...0 bar	-1000...0 mbar	-14.5...0 psi	-29.5...0 inHg	-100...0 kPa
Process connection	threaded connection G 1/4 internal thread M6 I				
Application					
Special feature	Gold-plated contacts				
Measuring element	ceramic-capacitive pressure measuring cell				
Application	for industrial applications				
Media	liquids and gases				
Medium temperature [°C]	-25...80				
Min. burst pressure	50000 mbar	725 psi	1450 inHg	5000 kPa	
Pressure rating	20000 mbar	290 psi	590 inHg	2000 kPa	
Vacuum resistance	-1000 mbar		-0.1 MPa		
Type of pressure	relative pressure; vacuum				
Electrical data					
Operating voltage [V]	18...30 DC; (to SELV/PELV)				
Current consumption [mA]	< 35				
Min. insulation resistance [MΩ]	100; (500 V DC)				
Protection class	III				
Reverse polarity protection	yes				
Power-on delay time [s]	0.3				
Integrated watchdog	yes				

PN3129

Pressure sensor with display

PN-0-1BRER14-MFRKG/US/ /V

Inputs / outputs					
Number of inputs and outputs	Number of digital outputs: 1; Number of analogue outputs: 1				
Outputs					
Total number of outputs	2				
Output signal	switching signal; analogue signal; IO-Link; (configurable)				
Electrical design	PNP				
Number of digital outputs	1				
Output function	normally open / normally closed; (parameterisable)				
Max. voltage drop switching output DC [V]	2.5				
Permanent current rating of switching output DC [mA]	150; (200 (...60 °C) 250 (...40 °C))				
Switching frequency DC [Hz]	< 170				
Number of analogue outputs	1				
Analogue current output [mA]	4...20				
Max. load [Ω]	500				
Analogue voltage output [V]	0...10				
Min. load resistance [Ω]	2000				
Short-circuit protection	yes				
Type of short-circuit protection	pulsed				
Overload protection	yes				
Measuring/setting range					
Measuring range	-1...0 bar	-1000...0 mbar	-14.5...0 psi	-29.5...0 inHg	-100...0 kPa
Factory setting / CMPT = 2					
Set point SP	-990...0 mbar	-14.4...0 psi	-29.3...0 inHg	-99...0 kPa	
Reset point rP	-995...-5 mbar	-14.45...-0.05 psi	-29.4...-0.1 inHg	-99.5...-0.5 kPa	
Min. difference between SP and rP	5 mbar	0.1 psi	0.2 inHg	0.5 kPa	
In steps of	5 mbar	0.05 psi	0.1 inHg	0.5 kPa	
Status_B High Resolution / CMPT = 3					
Set point SP	-992...0 mbar	-14.38...0 psi	-29.3...0 inHg	-99.2...0 kPa	
Reset point rP	-997...-5 mbar	-14.45...-0.07 psi	-29.4...-0.1 inHg	-99.7...-0.5 kPa	
Min. difference between SP and rP	5 mbar	0.08 psi	0.2 inHg	0.5 kPa	
In steps of	1 mbar	0.01 psi	0.1 inHg	0.1 kPa	
Accuracy / deviations					
Switch point accuracy [% of the span]	< ± 0,5				
Repeatability [% of the span]	< ± 0,1; (with temperature fluctuations < 10 K)				
Characteristics deviation [% of the span]	< ± 0,25 (BFSL) / < ± 0,5 (LS); (BFSL = Best Fit Straight Line; LS = limit value setting)				
Hysteresis deviation [% of the span]	< ± 0,25				
Long-term stability [% of the span]	< ± 0,05; (per 6 months)				

PN3129

Pressure sensor with display

PN-0-1BRER14-MFRKG/US/ /V

Temperature coefficient zero point [% of the span / 10 K]		< ± 0,2; (-0...80 °C)
Temperature coefficient span [% of the span / 10 K]		< ± 0,2; (-0...80 °C)
Response times		
Response time [ms]		< 3
Delay time programmable dS, dr [s]		0...50
Damping process value dAP [s]		0...4
Damping for the analogue output dAA [s]		0...4
Max. response time analogue output [ms]		3
Software / programming		
Parameter setting options		hysteresis / window; normally open / normally closed; switch-on/ switch-off delay; Damping; Display unit; current/voltage output
Interfaces		
Communication interface		IO-Link
Transmission type		COM2 (38,4 kBaud)
IO-Link revision		1.1
SDCI standard		IEC 61131-9
SIO mode		yes
Required master port type		A
Process data analogue		1
Process data binary		1
Supported DeviceIDs	**Type of operation**	**DeviceID**
	Factory setting / CMPT = 2	434
	Status_B High Resolution / CMPT = 3	619
Note		For further information please see the IODD PDF file under "Downloads"
Factory setting / CMPT = 2		
Profiles	Smart Sensor - SSP 0	Generic Profiled Sensor
	Function	Device identification
	Function	Process data variable
	Function	Device diagnosis
Min. process cycle time [ms]		2.3
IO-Link resolution pressure	1 mbar	0.001 MPa
IO-Link process data (cyclical)	**function**	**bit length**
	pressure	14
	binary switching information	1
IO-Link functions (acyclical)		application specific tag
Status_B High Resolution / CMPT = 3		
Profiles	Smart Sensor - SSP 3.1	Measuring Sensor
	Common - I&D	Identification and Diagnosis
Min. process cycle time [ms]		3
IO-Link resolution pressure	0.5 mbar	0.0005 MPa

PN3129

Pressure sensor with display

PN-0-1BRER14-MFRKG/US/ /V

IO-Link process data (cyclical)		**function**	**bit length**
		pressure	16
		device status	4
		binary switching information	1
IO-Link functions (acyclical)		application specific tag	
Operating conditions			
Ambient temperature	[°C]	-25...80	
Storage temperature	[°C]	-40...100	
Protection		IP 65; IP 67	
Tests / approvals			
EMC		DIN EN 61000-6-2	
		DIN EN 61000-6-3	
Shock resistance		DIN EN 60068-2-27	50 g (11 ms)
Vibration resistance		DIN EN 60068-2-6	20 g (10...2000 Hz)
MTTF	[years]	226	
UL approval		UL approval no.	J004
Pressure Equipment Directive		Sound engineering practice; can be used for group 2 fluids; group 1 fluids on request	
Mechanical data			
Weight	[g]	234.5	
Housing		cylindrical	
Dimensions	[mm]	Ø 34 / L = 90.7	
Materials		stainless steel (316L/1.4404); PBT+PC-GF30; PBT-GF20; PC	
Materials (wetted parts)		stainless steel (316L/1.4404); Al2O3 (ceramics); FKM	
Min. pressure cycles		100 million	
Tightening torque	[Nm]	25...35; (recommended tightening torque; depends on the lubrication, the seal and the pressure load)	
Process connection		threaded connection G 1/4 internal thread M6 I	
Restrictor element integrated		no (can be retrofitted)	
Displays / operating elements			
Display		Display unit	4 x LED, green (mbar, psi, kPa, inHg)
		switching status	1 x LED, yellow
		measured values	alphanumeric display, red/green 4-digit
Remarks			
Pack quantity		1 pcs.	

Electrical connection

Connector: 1 x M12; coding: A; Contacts: 4, gold-plated




PN3129

Pressure sensor with display

PN-0-1BRER14-MFRKG/US/ /V

Connection

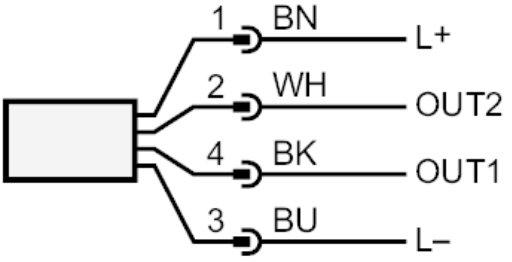

OUT1	switching output IO-Link
OUT2	analogue output
	Core colours :
BK =	black
BN =	brown
BU =	blue
WH =	white