
E70455


AS-Interface flat cable insulation displacement connector

FC Splitter ye ProcessL

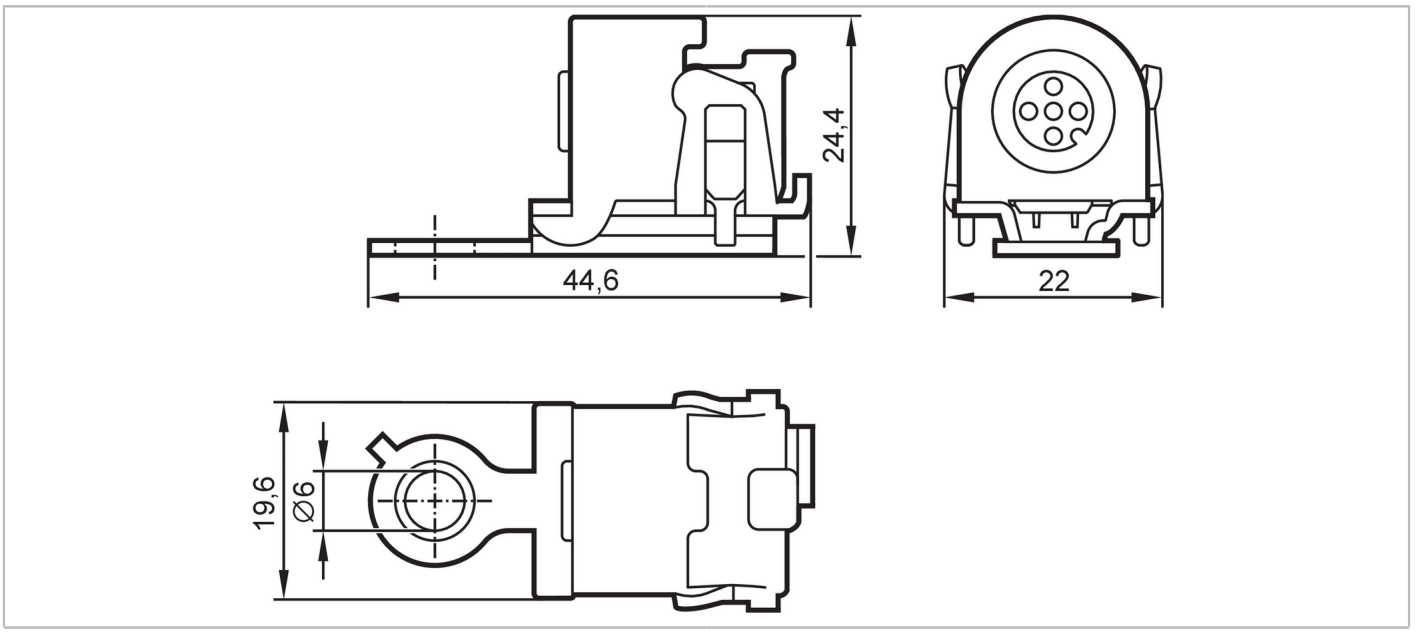

Application		
Design		AS-i
Electrical data		
Operating voltage	[V]	26.5...31.6 DC
Outputs		
Max. current load outputs total	[A]	2
Operating conditions		
Ambient temperature	[°C]	-30...80
Protection		IP 68; IP 69K
Tests / approvals		
EMC		EN 61000-6-2
Mechanical data		
Weight	[g]	47
Materials		metal parts: stainless steel (316L/1.4404); rubber gasket for contact pins: FPM; O-ring: EPDM
Accessories		
Accessories (optional)		Torque wrench:, E70390
Remarks		
Pack quantity		1 pcs.
Electrical connection		

Connector: 1 x M12; coding: A; Contacts: 5; Tightening torque: ...0.8 Nm



E70455

AS-Interface flat cable insulation displacement connector

FC Splitter ye ProcessL

Connection

1: AS-i +
2: n.c.
3: AS-i -
4: n.c.
5: n.c.