
SA6010

Flow sensor

SAN12XDBFRKG/US-100

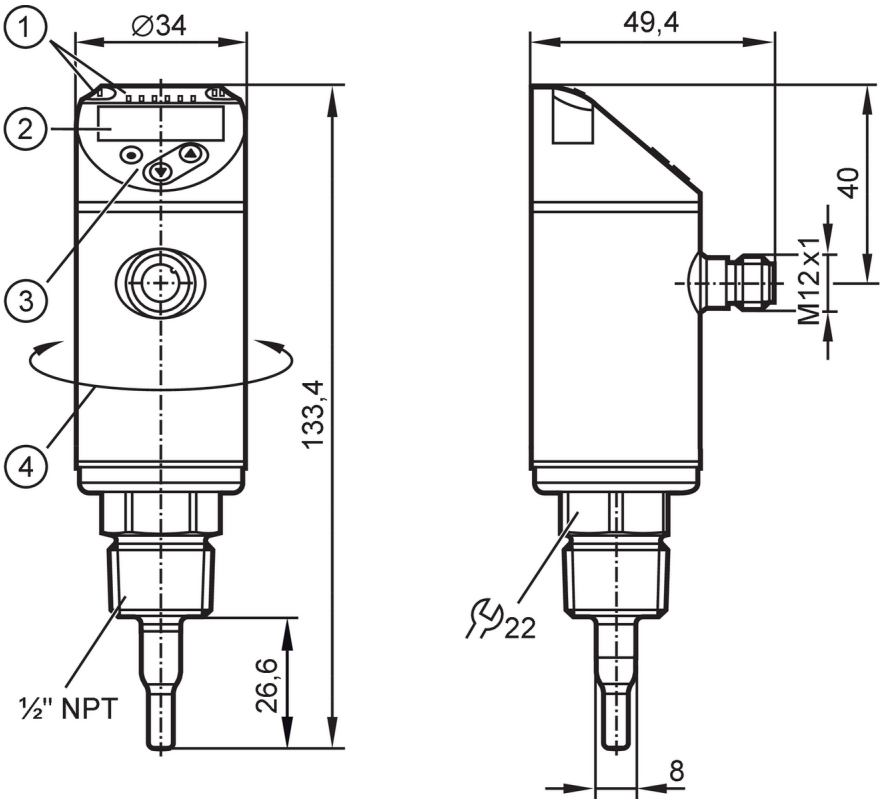

1 LEDs Display unit / switching status
2 alphanumeric display 4-digit red/green
3 programming buttons
4 upper part of the housing can be rotated 345°

Product characteristics			
Number of inputs and outputs		Number of digital outputs: 2; Number of analogue outputs: 1	
Process connection		threaded connection 1/2" NPT external thread	
Application			
Special feature		Gold-plated contacts	
Media		water; glycol solutions; air; oils	
Note on media		low-viscosity oils with viscosity: ≤ 40 mm²/s (104 °F)	
		high-viscosity oils with viscosity: > 40 mm²/s (104 °F)	
Medium temperature	[°F]	-4...194	
Pressure rating		100 bar	1450 psi	10 MPa
MAWP for applications according to CRN	[bar]	100	
Electrical data			
Operating voltage	[V]	18...30 DC	
Current consumption	[mA]	< 100	
Protection class		III	
Reverse polarity protection		yes	
Power-on delay time	[s]	10	
Measuring principle		calorimetric	

SA6010

Flow sensor

SAN12XDBFRKG/US-100

Inputs / outputs		
Number of inputs and outputs		Number of digital outputs: 2; Number of analogue outputs: 1
Outputs		
Total number of outputs		2
Output signal		switching signal; analogue signal; frequency signal; IO-Link; (configurable)
Electrical design		PNP/NPN
Number of digital outputs		2
Output function		normally open / normally closed; (parameterisable)
Max. voltage drop switching output DC	[V]	2.5
Permanent current rating of switching output DC	[mA]	250
Number of analogue outputs		1
Analogue current output	[mA]	4...20; (scalable)
Max. load	[Ω]	350
Short-circuit protection		yes
Type of short-circuit protection		pulsed
Overload protection		yes
Frequency of the output	[Hz]	0...1000
Measuring/setting range		
Probe length L	[mm]	26.6
Operating mode		relative; absolutely liquid; absolutely gaseous; (absolute: reference measurement recommended; Factory setting: relative)
Temperature monitoring		
Measuring range	[°F]	-4...194
Resolution	[°F]	0.5
Liquid media - absolute operating mode		
Setting range	[ft/s]	0...9.85
Greatest sensitivity	[ft/s]	0.15...9.85
Liquid media - relative operating mode		
Setting range	[ft/s]	0...19.5
Greatest sensitivity	[ft/s]	0.15...9.85
Gases - operating mode "absolute"		
Setting range	[ft/s]	6...328
Greatest sensitivity	[ft/s]	6...328
Gases - operating mode "relative"		
Setting range	[ft/s]	6...656
Greatest sensitivity	[ft/s]	6...328
Accuracy / deviations		
Temperature drift	[cm/s x 1/K]	0,01 fps x 1/K (< 68 °F; > 158 °F)
Temperature gradient	[K/min]	100
Absolute operating mode		
Repeatability		0,05 m/s; (water; flow velocity: 0,05...3 m/s)

SA6010

Flow sensor

SAN12XDBFRKG/US-100

Relative operating mode			
Accuracy		± (7 % MW + 2 % MEW); (for relative mode in the range of maximum sensitivity under the following conditions:; water: 68...158 °F; inlet length: 5 ft; DN25 (DIN 2448); mounting position according to instructions; Accuracy can differ for other media and mounting positions.)	
Repeatability		0,05 m/s; (water; flow velocity: 0,05...3 m/s)	
Temperature monitoring			
Temperature drift		± 0,003 K/°F	
Accuracy	[K]	± 0,3 / ± 1; (water; flow velocity: 1...9,85 fps / air; flow velocity: > 32,8 fps)	
Response times			
Response time	[s]	0.5; (T09; water; glycol: 0,8 s; air: 7 s; oil: 1,8 s; each T09)	
Temperature monitoring			
Dynamic response T05 / T09	[s]	1,5 (T09); (water; flow velocity: 1...9,85 fps)	
Software / programming			
Parameter setting options		hysteresis / window; normally open / normally closed; switching logic; current/ frequency output; medium selection; Damping; Teach function; display can be rotated and switched off; standard unit of measurement; process value colour	
Interfaces			
Communication interface		IO-Link	
Transmission type		COM2 (38,4 kBaud)	
IO-Link revision		1.1	
SDCI standard		IEC 61131-9	
Profiles		Smart Sensor - SSP 0	Generic Profiled Sensor
		Function	Device identification
		Function	Process data variable
		Function	Device diagnosis
SIO mode		yes	
Required master port type		A	
Process data analogue		2	
Process data binary		2	
Min. process cycle time	[ms]	3	
Supported DeviceIDs		**Type of operation**	**DeviceID**
		Factory setting / ModE = (REL)	537
		ModE = (GAS)	551
		ModE = (LIQU)	544
Operating conditions			
Ambient temperature	[°F]	-40...176	
Storage temperature	[°F]	-40...212	
Protection		IP 65; IP 67	
Tests / approvals			
EMC		DIN EN 60947-5-9	
Shock resistance		DIN EN 60068-2-27	50 g (11 ms)
Vibration resistance		DIN EN 60068-2-6	20 g (10...2000 Hz)
MTTF	[years]	143	
UL approval		UL approval no.	I003
		File number UL	E174189

SA6010

Flow sensor

SAN12XDBFRKG/US-100

Mechanical data		
Weight	[g]	251.5
Housing		cylindrical
Dimensions	[mm]	Ø 34 / L = 133.4
Materials		stainless steel (316L/1.4404); stainless steel (301/1.4310); PBT-GF20; PBT-GF30
Materials (wetted parts)		stainless steel (316L/1.4404)
Process connection		threaded connection 1/2" NPT external thread
Probe diameter	[mm]	5
Installation length EL	[mm]	26.6

Displays / operating elements		
Display	Display unit	6 x LED, green (%, fps, gpm, cfm, °F, 10^3)
	switching status	2 x LED, yellow
	measured values	alphanumeric display, red/green 4-digit

Remarks	
Remarks	MW = measured value
	MEW = Final value of the measuring range
Pack quantity	1 pcs.

Electrical connection

Connector: 1 x M12; coding: A; Contacts: 4, gold-plated




SA6010

Flow sensor

SAN12XDBFRKG/US-100

Connection

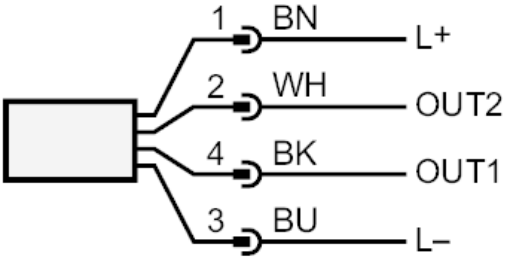

	colours to DIN EN 60947-5-2
OUT1:	
-	switching output volumetric flow quantity monitoring
-	frequency output volumetric flow quantity monitoring
-	IO-Link
OUT2:	
-	switching output volumetric flow quantity monitoring
-	switching output Temperature monitoring
-	analogue output volumetric flow quantity monitoring
-	analogue output Temperature monitoring
-	frequency output volumetric flow quantity monitoring
-	frequency output Temperature monitoring
-	input External Teach
	Core colours :
BK =	black
BN =	brown
BU =	blue
WH =	white