
E10108

Wirable socket

SDOAH040PLSFKPG

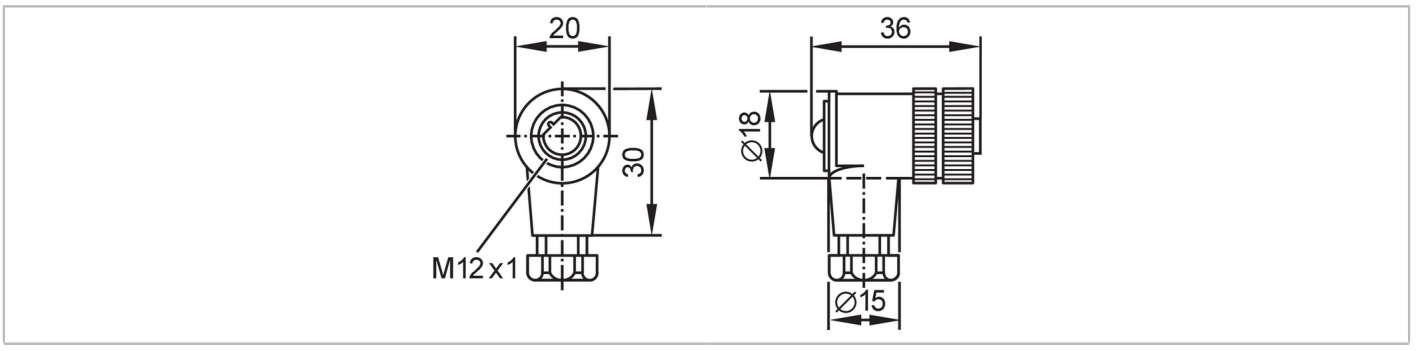


Application		
Application		Industrial applications / factory automation
Electrical data		
Operating voltage	[V]	< 250 AC/DC
Max. current load total	[A]	4
Operating conditions		
Ambient temperature	[°C]	-40...85
Protection		IP 67
Mechanical data		
Weight	[g]	15.2
Dimensions	[mm]	36 x 20 x 30
Moulded-body material		PA
Material nut		PA
Remarks		
Pack quantity		1 pcs.

Electrical connection

screw terminals: ...0.75 mm²; Cable sheath: Ø 4...6 mm; AWG 18

Electrical connection - socket

Connector: 1 x M12, angled; coding: B; Contacts: 4, white bronze coated; Moulded body: PA; Locking: PA



Connection

